

DeltaCorroCorro-EPS-FR is an Insulated Roof Panel System, comprising of two pre-painted, roll-formed steel skins, bonded to a fire retardant grade expanded polystyrene insulating core.

CodeMark Australia Certificate CM40309 certifies that DeltaCorroCorro-EPS-FR complies with the stated BCA2019 performance requirements. Please refer to the certificate as displayed on our website for the exact details of the compliance.

Both skins offer classical corrugated lines with all of the benefits of modern Insulated Panel technologies.


Recommendations

- Commercial Buildings
- Community Covered Areas
- Schools
- Sporting Complexes
- Covered Walkways
- Wineries
- Architectural Features
- Shopping Centres

Single Spans (mm)					
Wind Category	Panel Thickness	3 Sides Open	2 Sides Open	1 Side Open	Fully Enclosed
N2 (W33)	75	4900	4900	4900	4900
	100	6300	6300	6300	6300
	125	7600	7600	7600	7600
N3 (W41)	75	4800	4400	4000	4000
	100	6000	5600	5100	5100
	125	7300	6700	6100	6100
N4 (W50)	75	4000	3500	3200	3200
	100	5000	4600	4200	4200
	125	6000	5600	5000	5000

Steel Skin Details	Top Skin	0.42mm / G550 AZ150
	Bottom Skin	0.42mm / G550 AZ150
Max. Skin Temperature	78°C Dry Heat	
Core Material Details	Expanded Polystyrene - Fire Retardant Grade	
Thermal Conductivity AS 1366.2/ASTM C 518	0.037 W/mK @22.5°C	
Adhesive	Thermosetting two-part adhesive	
Core Density	13.5kg/m ³	
Weight (kg/m²)	75mm Panel	12.86
	100mm Panel	13.25
	125mm Panel	13.77
	150mm Panel	14.04
	175mm Panel	14.69
	200mm Panel	15.34
	225mm Panel	15.99
	250mm Panel	16.64
R Value @ 8°C m2 K/W	75mm Panel	1.6
	100mm Panel	2.3
	125mm Panel	3.1
	150mm Panel	3.6
	175mm Panel	4.3
	200mm Panel	5.0
	225mm Panel	5.8
	250mm Panel	6.4
Certificate of Conformity	CodeMark Australia Certificate - CM40309	
Sheet Coverage	1000mm	
Length (mm)	Cut to Length Min of 1800mm	
Length Tolerance (mm)	5mm+/-	
Thickness (mm)	75, 100, 125, 150, 175, 200, 225, 250	
Minimum Roof Pitch	Building Classes 1-9	- 5°
	Building Class 10	- 3°

Version Date: 15.12.2020

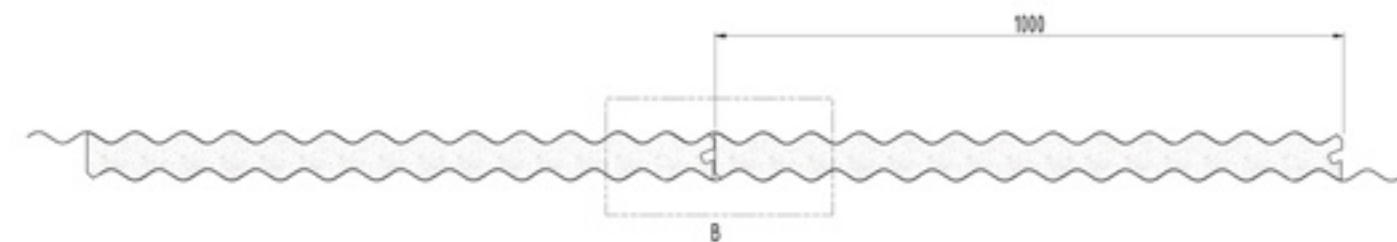

Detail B

Early Fire Hazard Properties AS 1530.3:1999

AWTA Test Report 18-006076 14-11-2018

Index	Test Range	External Top Skin
Ignitability	0-20	0
Spread of Flame	0-10	0
Heat Evolved	0-10	0
Smoke Developed	0-10	2

DeltaCorroCorro-EPS-FR Acoustic Values

Frequency		75mm	150mm
	100	15.41	15.00
	160	16.40	15.09
	200	18.81	17.70
	250	19.70	18.51
	315	21.39	19.40
	400	22.31	19.69
	630	23.40	19.10
	800	23.69	17.31
	1000	25.61	18.29
	1250	21.01	30.10
	1600	20.00	36.19
	2000	34.79	37.30
	2500	41.70	37.09
	3150	44.10	35.69
	5000	44.61	39.90
	STC	24.00	23.00
	RW	25.00	24.00

DeltaCorroCorro-EPS-FR Acoustic Testing has been performed in compliance with the requirements of AS 1191-2002 "Acoustics - Method for Laboratory Measurement of Airborne Sound Insulation of Building Elements".

The procedures specified by AS 1276-1979 and AS/NZS ISO 717.1:2004 were used to calculate the Sound Transmission Class (STC) and the Weighted Sound Reduction Index (Rw) of **DeltaCorroCorro-EPS-FR**.

DeltaCorroCorro-EPS-FR is classed as traficable when used in a roof application. The following recommendations should be observed at all times.

Recommendations

- Wear flat, rubber soled shoes
- Walk over the roof supporting beams
- Spread your weight over as many roof crests as possible
- Crawl boards should be used when accessing areas not supported by a structure

DeltaCorroCorro-EPS-FR Fixing Details

Crest fixing only. One fixing every second crest

Panel Thickness (mm)	Fixing into Steel	Fixing into Timber
75	Tek 14 x 115 Hex Head Screw	T17 14 x 125 Hex Head Screw
100	Tek 14 x 135 Hex Head Screw	T17 14 x 150 Hex Head Screw
125	Tek 14 x 150 Hex Head Screw	T17 14 x 175 Hex Head Screw
150	Tek 14 x 175 Hex Head Screw	T17 14 x 200 Hex Head Screw
175	Tek 14 x 200 Hex Head Screw	T17 14 x 230 Hex Head Screw
200	Tek 14 x 230 Hex Head Screw	T17 14 x 265 Hex Head Screw
225	Tek 14 x 260 Hex Head Screw	T17 14 x 265 Hex Head Screw
250	Tek 14 x 300 Hex Head Screw	T17 14 x 300 Hex Head Screw

Use Cyclone Plate and Neo Washer on each fixing.

Upon Installation the overlap needs to be stitch screwed or riveted every 300mm.